


Profile

A 12 SUPERLIGHT

Professional Aluminum Boats

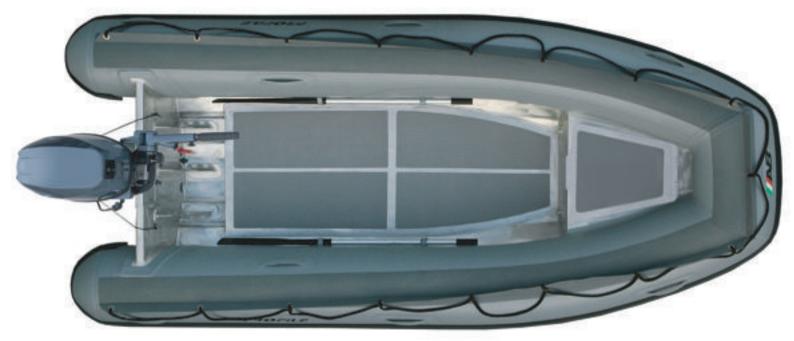

| | Overal Length | : 12'/ 3.66m | Number of Chambers | : 3 | Shaft Length | :20″/50.8cm |
|-----------|---------------|----------------|--------------------|-----------------|---------------------|-------------|
| S P E C S | Overal Beam | : 6'1"/ 1.85m | Person Capacity | : 6 | RDC Design Category | : C |
| | Inside Length | : 8'10"/ 2.70m | Weight | : 231lb /105kg | | |
| | Inside Beam | : 2'11"/ 0.89m | Recommended HP | : 25hp /18.7kw | | |
| | Tube Diameter | : 18″/ 0.46m | Maximum HP | : 30hp / 22.4kw | | |

- Deep "V" Marine Grade Aluminum Hull
 - Stringer System Welded Under Aluminum Deck

ΩS പ ന

ЧЧ

 \Box \Box

zμ

A A

⊢ш

νц

<u>ہ ب</u>

⊲ ш

Zĸ

o⊃

 $\vdash \triangleleft$

ு ய

Оц

- Life Line Around Tube Non Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
 Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails Push Push Plastic Non-Corrosive 2 Stage Inflation Valves 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- Paddle Holders
- Hand Pump
- Maintenance Kit Owner's Manual
- 3 Layer Reinforced Seams

Paddles with Aluminum Shaft

Rubber Protector on Full Length of Keel

- Tube Chaps Boat Cover
- **Chock Set**
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Fiberglass Console
- Customized Aluminum Consoles & Seats Upon Request



- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Bow Locker/ Seat
- Aluminum Console
- Aluminum Lean On
- 6 Gal. Portable Fuel Tank Installed in Bow Locker
- Bench Seat with Storage