


Profile

A 14 SUPERLIGHT

Professional Aluminum Boats

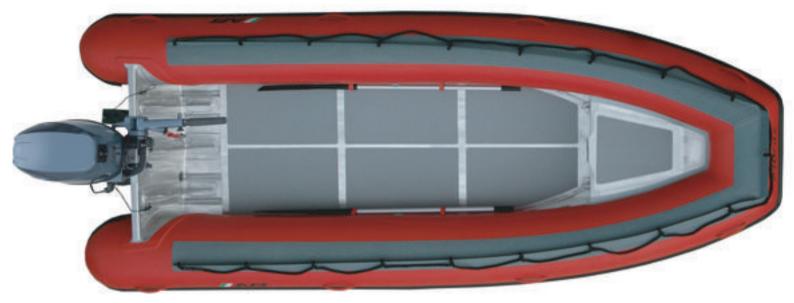

	Overal Length	:	14'/ 4.27m	Number of Chambers	: 4	Shaft Length	:20″/50.8cm
SPECS	Overal Beam	:	6'7"/ 2.00m	Person Capacity	: 8	RDC Design Category	: C
	Inside Length	:	10'10"/3.30m	Weight	: 287lb/130kg		
	Inside Beam	:	3′3″/ 0.99m	Recommended HP	: 40hp/29.8kw		
	Tube Diameter	:	19″/ 0.48m	Maximum HP	: 50hp / 37.3kw		

ΩS പ ന

ЧЧ

 $\Box \supset$

z⊢

∢∢

⊢ш

νц

പ ഗ

< ш

Zĸ

0⊃

⊢∢

ு ய

Оц

Ē

- Deep "V" Marine Grade Aluminum Hull Stringer System Welded Under Aluminum Deck
- Life Line Around Tube Non Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers

Tube Chaps

Boat Cover

Chock Set

- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Paddles with Aluminum Shaft Paddle Holders
- Hand Pump

- Maintenance Kit Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel
- Double Solid Rub Rails Push Push Plastic Non-Corrosive 2 Stage Inflation Valves 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes

- Lateral Fold Down Stainless Steel Cleat Removable Rowing Seat Fiberglass Console with Forward Seat **Fiberglass Console**
 - Customized Aluminum Consoles & Seats Upon Request

Bow Step with Fold Down Stainless Steel Cleat



www.abinflatables.com

- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Bow Locker/ Seat
- Aluminum Console
- Aluminum Lean On
- 6 Gal. Portable Fuel Tank Installed in Bow Locker
- Bench Seat with Storage