


**Profile** | **A 11-S SUPERLIGHT** Professional Shallow Water Aluminum Boats

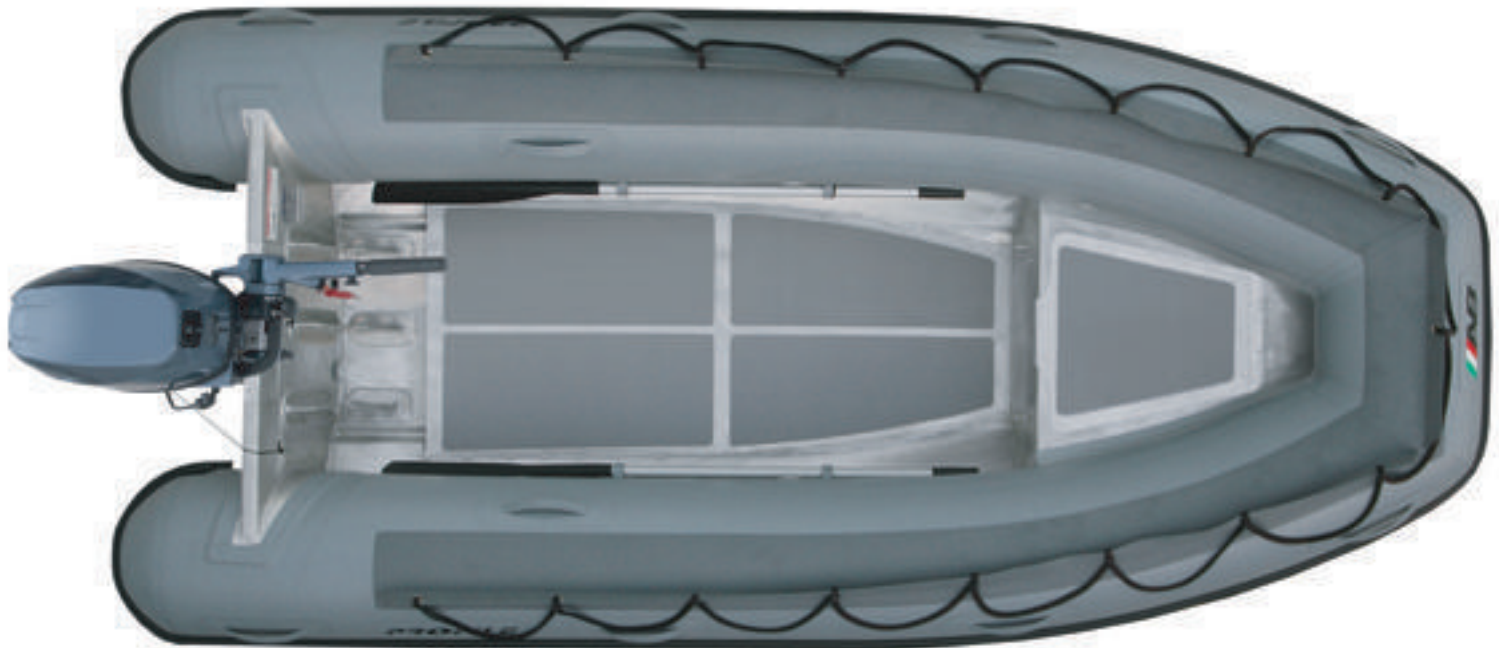

<b>S P E C S</b>	Overall Length : 11'6" / 3.50m	Number of Chambers : 3	Shaft Length : 15" / 38.1cm
	Overall Beam : 5'7" / 1.70m	Person Capacity : 6	RDC Design Category : C
	Inside Length : 8'6" / 2.60m	Weight : 227lb / 103kg	
	Inside Beam : 2'8" / 0.81m	Recommended HP : 20hp / 14.9kw	
	Tube Diameter : 17" / 0.43m	Maximum HP : 30hp / 22.4kw	

<b>S T A N D A R D F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Marine Grade Aluminum Hull - Shallow Water Version</li> <li>■ Stringer System Welded Under Aluminum Deck</li> <li>■ Life Line Around Tube</li> <li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li> <li>■ Pressure Relief Valves</li> <li>■ Drain Scuppers</li> <li>■ Heavy Duty Transom Knee</li> <li>■ Non - Skid Rubber Floor Panels</li> <li>■ Plastic External Transom Plate</li> <li>■ Aluminum Internal Transom Plate</li> </ul>	<ul style="list-style-type: none"> <li>■ Aluminum Bow Eye</li> <li>■ 4 Aluminum Davit Lifting Points</li> <li>■ Aluminum Transom Tie Down &amp; Towing Rings</li> <li>■ Aluminum Bow Tie Down &amp; Towing Rings</li> <li>■ Deck Drain with Plug</li> <li>■ Heavy Duty 1670 Dectex Orca(CSM) Five Layer Coated Fabric</li> <li>■ Double Solid Rub Rails</li> <li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li> <li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li> </ul>	<ul style="list-style-type: none"> <li>■ Paddles with Aluminum Shaft</li> <li>■ Paddle Holders</li> <li>■ Hand Pump</li> <li>■ Maintenance Kit</li> <li>■ Owner's Manual</li> <li>■ 3 Layer Reinforced Seams</li> <li>■ Rubber Protector on Full Length of Keel</li> </ul>
--	--	--	--


<b>O P T I O N A L F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Tube Chaps</li> <li>■ Boat Cover</li> <li>■ Chock Set</li> <li>■ Bow Step with Fold Down Stainless Steel Cleat</li> <li>■ Lateral Fold Down Stainless Steel Cleat</li> <li>■ Removable Rowing Seat</li> <li>■ Fiberglass Console with Forward Seat</li> <li>■ Fiberglass Console</li> <li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li> </ul>	<ul style="list-style-type: none"> <li>■ One Person Jockey Seat</li> <li>■ Two Person Jockey Seat</li> <li>■ Stainless Steel Helm Unit</li> <li>■ Bow Locker/ Seat</li> <li>■ Aluminum Console</li> <li>■ Aluminum Lean On</li> <li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li> <li>■ Bench Seat with Storage</li> </ul>
--	---	---



# Profile

**A 12-S SUPERLIGHT**

**Professional Shallow Water  
Aluminum Boats**

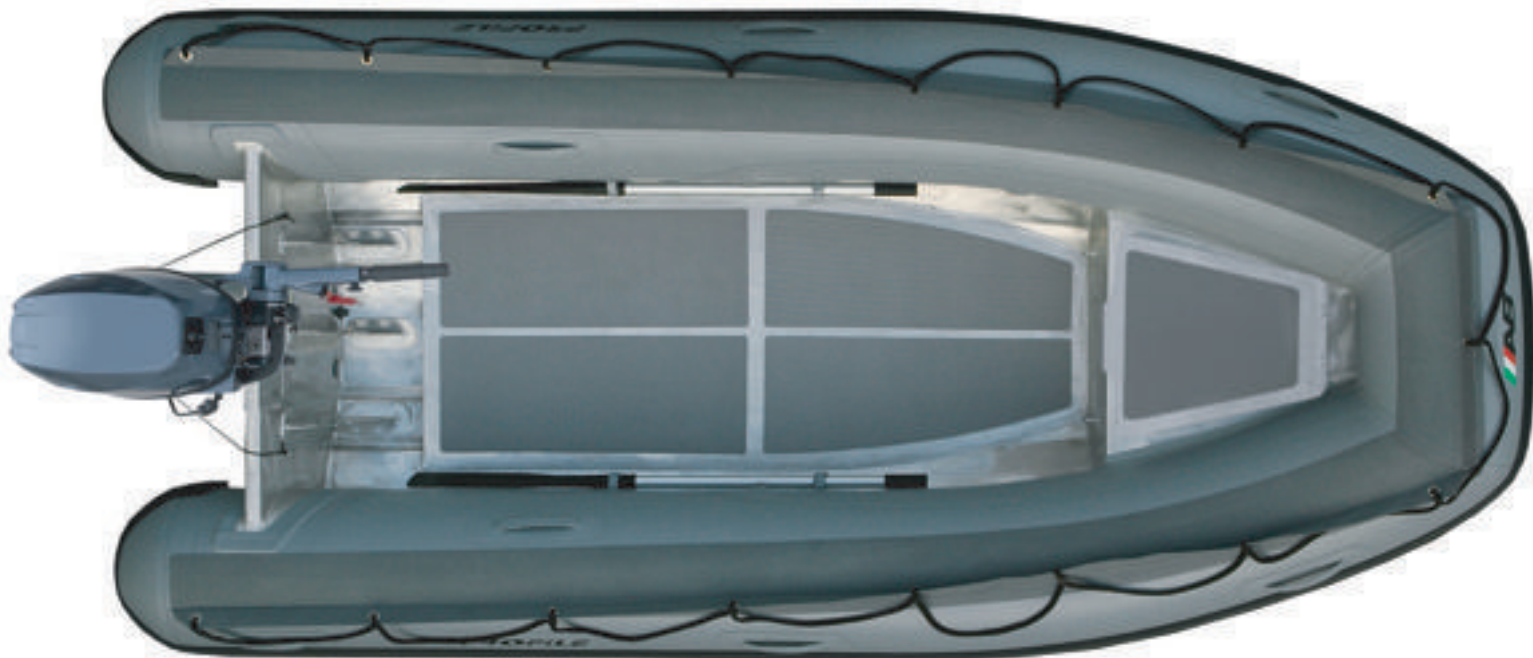

**S P E C S**

Overall Length	: 12' / 3.66m	Number of Chambers	: 3	Shaft Length	: 15" / 38.1cm
Overall Beam	: 5'11" / 1.8m	Person Capacity	: 6	RDC Design Category	: C
Inside Length	: 8'10" / 2.70m	Weight	: 242lb / 110kg		
Inside Beam	: 2'10" / 0.86m	Recommended HP	: 25hp / 18.7kw		
Tube Diameter	: 18" / 0.46m	Maximum HP	: 30hp / 22.4kw		

**S T A N D A R D  
F E A T U R E S**


- Marine Grade Aluminum Hull - Shallow Water Version
- Stringer System Welded Under Aluminum Deck
- Life Line Around Tube
- Non - Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate
- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

**O P T I O N A L  
F E A T U R E S**

- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Fiberglass Console
- Customized Aluminum Consoles & Seats Upon Request
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Bow Locker/ Seat
- Aluminum Console
- Aluminum Lean On
- 6 Gal. Portable Fuel Tank Installed in Bow Locker
- Bench Seat with Storage



**Profile** | **A 13-S SUPERLIGHT** Professional Shallow Water Aluminum Boats

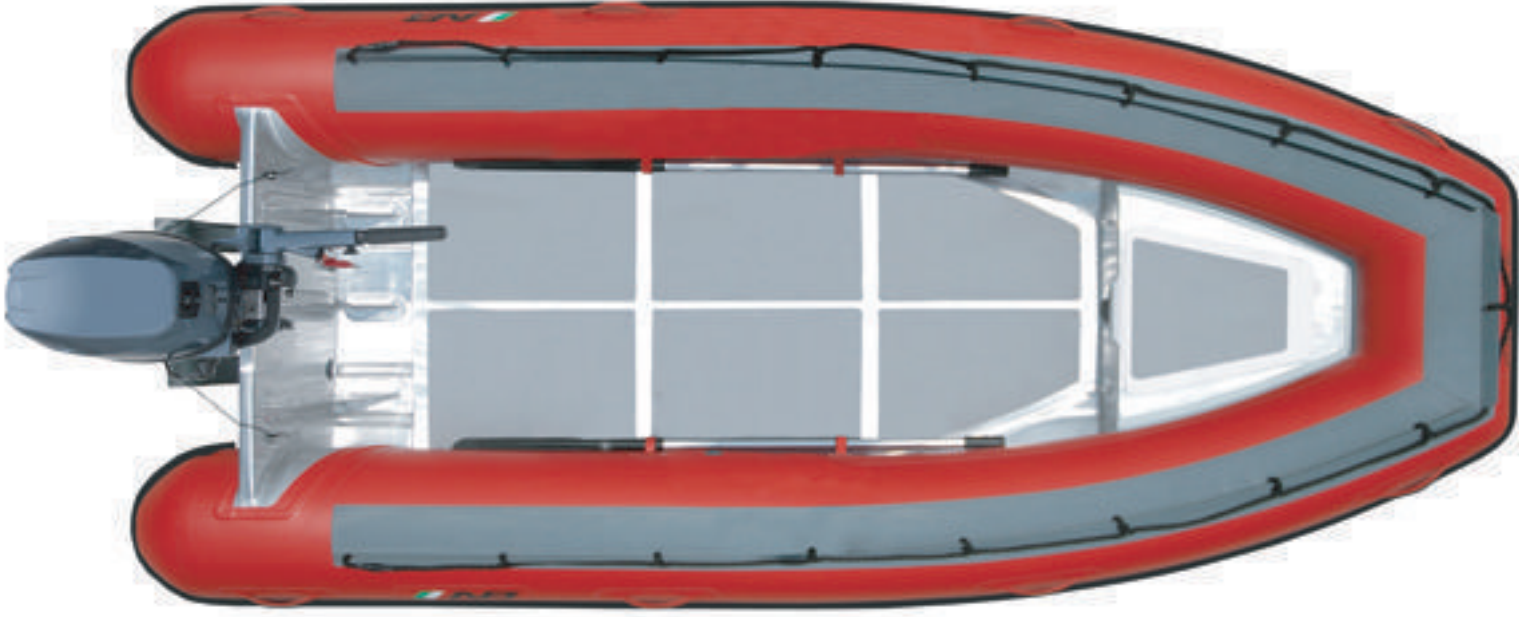

<b>S P E C S</b>	Overall Length : 13' / 3.96m	Number of Chambers : 3	Shaft Length : 20" / 50.8cm
	Overall Beam : 6'5" / 1.96m	Person Capacity : 7	RDC Design Category : C
	Inside Length : 9'10" / 3.00m	Weight : 282lb/128kg	
	Inside Beam : 3'3" / 0.99m	Recommended HP : 30hp / 22.4kw	
	Tube Diameter : 18" / 0.46m	Maximum HP : 40hp / 29.8kw	

<b>S T A N D A R D F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Marine Grade Aluminum Hull - Shallow Water Version</li> <li>■ Stringer System Welded Under Aluminum Deck</li> <li>■ Life Line Around Tube</li> <li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li> <li>■ Pressure Relief Valves</li> <li>■ Drain Scuppers</li> <li>■ Heavy Duty Transom Knee</li> <li>■ Non - Skid Rubber Floor Panels</li> <li>■ Plastic External Transom Plate</li> <li>■ Aluminum Internal Transom Plate</li> </ul>	<ul style="list-style-type: none"> <li>■ Aluminum Bow Eye</li> <li>■ 4 Aluminum Davit Lifting Points</li> <li>■ Aluminum Transom Tie Down &amp; Towing Rings</li> <li>■ Aluminum Bow Tie Down &amp; Towing Rings</li> <li>■ Deck Drain with Plug</li> <li>■ Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric</li> <li>■ Double Solid Rub Rails</li> <li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li> <li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li> </ul>	<ul style="list-style-type: none"> <li>■ Paddles with Aluminum Shaft</li> <li>■ Paddle Holders</li> <li>■ Hand Pump</li> <li>■ Maintenance Kit</li> <li>■ Owner's Manual</li> <li>■ 3 Layer Reinforced Seams</li> <li>■ Rubber Protector on Full Length of Keel</li> </ul>
--	--	---	--

<b>O P T I O N A L F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Tube Chaps</li> <li>■ Boat Cover</li> <li>■ Chock Set</li> <li>■ Bow Step with Fold Down Stainless Steel Cleat</li> <li>■ Lateral Fold Down Stainless Steel Cleat</li> <li>■ Removable Rowing Seat</li> <li>■ Fiberglass Console with Forward Seat</li> <li>■ Fiberglass Console</li> <li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li> </ul>	<ul style="list-style-type: none"> <li>■ One Person Jockey Seat</li> <li>■ Two Person Jockey Seat</li> <li>■ Stainless Steel Helm Unit</li> <li>■ Bow Locker/ Seat</li> <li>■ Aluminum Console</li> <li>■ Aluminum Lean On</li> <li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li> <li>■ Bench Seat with Storage</li> </ul>
--	---	---



**Profile** | **A 14-S SUPERLIGHT** Professional Shallow Water Aluminum Boats



<b>S P E C S</b>	Overall Length : 14' / 4.27m	Number of Chambers : 4	Shaft Length : 20" / 50.8cm
	Overall Beam : 6'5" / 1.96m	Person Capacity : 8	RDC Design Category : C
	Inside Length : 10'10" / 3.30m	Weight : 317lb / 144kg	
	Inside Beam : 3'3" / 0.99m	Recommended HP : 40hp / 29.8kw	
	Tube Diameter : 19" / 0.48m	Maximum HP : 50hp / 37.3kw	

<b>S T A N D A R D F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Marine Grade Aluminum Hull - Shallow Water Version</li> <li>■ Stringer System Welded Under Aluminum Deck</li> <li>■ Life Line Around Tube</li> <li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li> <li>■ Pressure Relief Valves</li> <li>■ Drain Scuppers</li> <li>■ Heavy Duty Transom Knee</li> <li>■ Non - Skid Rubber Floor Panels</li> <li>■ Plastic External Transom Plate</li> <li>■ Aluminum Internal Transom Plate</li> </ul>	<ul style="list-style-type: none"> <li>■ Aluminum Bow Eye</li> <li>■ 4 Aluminum Davit Lifting Points</li> <li>■ Aluminum Transom Tie Down &amp; Towing Rings</li> <li>■ Aluminum Bow Tie Down &amp; Towing Rings</li> <li>■ Deck Drain with Plug</li> <li>■ Heavy Duty 1670 Dectex Orca(CSM) Five Layer Coated Fabric</li> <li>■ Double Solid Rub Rails</li> <li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li> <li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li> </ul>	<ul style="list-style-type: none"> <li>■ Paddles with Aluminum Shaft</li> <li>■ Paddle Holders</li> <li>■ Hand Pump</li> <li>■ Maintenance Kit</li> <li>■ Owner's Manual</li> <li>■ 3 Layer Reinforced Seams</li> <li>■ Rubber Protector on Full Length of Keel</li> </ul>
--	--	--	--

<b>O P T I O N A L F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Tube Chaps</li> <li>■ Boat Cover</li> <li>■ Chock Set</li> <li>■ Bow Step with Fold Down Stainless Steel Cleat</li> <li>■ Lateral Fold Down Stainless Steel Cleat</li> <li>■ Removable Rowing Seat</li> <li>■ Fiberglass Console with Forward Seat</li> <li>■ Fiberglass Console</li> <li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li> </ul>	<ul style="list-style-type: none"> <li>■ One Person Jockey Seat</li> <li>■ Two Person Jockey Seat</li> <li>■ Stainless Steel Helm Unit</li> <li>■ Bow Locker/ Seat</li> <li>■ Aluminum Console</li> <li>■ Aluminum Lean On</li> <li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li> <li>■ Bench Seat with Storage</li> </ul>
--	---	---



**Profile** | **A 16-S SUPERLIGHT** Professional Shallow Water Aluminum Boats



<b>S P E C S</b>	Overall Length : 16' / 4.88m	Number of Chambers : 5	Shaft Length : 20" / 50.8cm
	Overall Beam : 7' / 2.14m	Person Capacity : 10	RDC Design Category : C
	Inside Length : 12'8" / 3.85m	Weight : 480lb / 218kg	
	Inside Beam : 3'6" / 1.08m	Recommended HP : 50hp / 37.3kw	
	Tube Diameter : 21" / 0.53m	Maximum HP : 60hp / 44.8kw	

<b>S T A N D A R D F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Marine Grade Aluminum Hull - Shallow Water Version</li> <li>■ Stringer System Welded Under Aluminum Deck</li> <li>■ Life Line Around Tube</li> <li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li> <li>■ Pressure Relief Valves</li> <li>■ Drain Scuppers</li> <li>■ Heavy Duty Transom Knee</li> <li>■ Non - Skid Rubber Floor Panels</li> <li>■ Plastic External Transom Plate</li> <li>■ Aluminum Internal Transom Plate</li> </ul>	<ul style="list-style-type: none"> <li>■ Aluminum Bow Eye</li> <li>■ 4 Aluminum Davit Lifting Points</li> <li>■ Aluminum Transom Tie Down &amp; Towing Rings</li> <li>■ Aluminum Bow Tie Down &amp; Towing Rings</li> <li>■ Deck Drain with Plug</li> <li>■ Heavy Duty 1670 Dectex Orca(CSM) Five Layer Coated Fabric</li> <li>■ Double Solid Rub Rails</li> <li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li> <li>■ 1 Front &amp; 5 Side Orca(CSM) Fabric Handles on Tubes</li> </ul>	<ul style="list-style-type: none"> <li>■ Paddles with Aluminum Shaft</li> <li>■ Paddle Holders</li> <li>■ Hand Pump</li> <li>■ Maintenance Kit</li> <li>■ Owner's Manual</li> <li>■ 3 Layer Reinforced Seams</li> <li>■ Rubber Protector on Full Length of Keel</li> </ul>
--	--	--	--

<b>O P T I O N A L F E A T U R E S</b>	<ul style="list-style-type: none"> <li>■ Tube Chaps</li> <li>■ Boat Cover</li> <li>■ Chock Set</li> <li>■ Bow Step with Fold Down Stainless Steel Cleat</li> <li>■ Lateral Fold Down Stainless Steel Cleat</li> <li>■ Removable Rowing Seat</li> <li>■ Fiberglass Console with Forward Seat</li> <li>■ Fiberglass Console</li> <li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li> </ul>	<ul style="list-style-type: none"> <li>■ One Person Jockey Seat</li> <li>■ Two Person Jockey Seat</li> <li>■ Stainless Steel Helm Unit</li> <li>■ Bow Locker/ Seat</li> <li>■ Aluminum Console</li> <li>■ Aluminum Lean On</li> <li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li> <li>■ Bench Seat with Storage</li> </ul>
--	---	---

